



















KNEE WALKER


## **USER MANUAL OF ELENKER KNEE WALKER**






#### HOW TO INSTALL THE KNEE SCOOTER

#### STEP 1

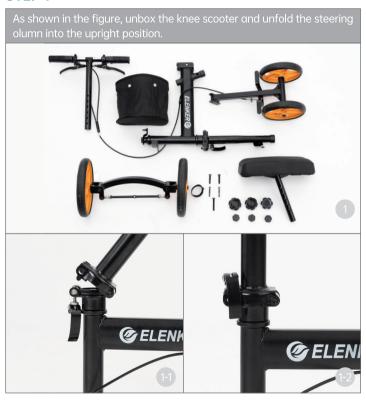

#### STEP 2

Install the knee scooter body: Align and insert the connecting rod in the middle of the knee scooter.

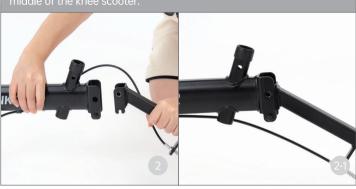

#### STEP 3

Insert a bolt (the longest one) and a knob into the rear frame and screw it securely. (The bolt head should be aligned to the opening, as shown below)





## STEP 4





### STEP 5



### STEP 6



#### STEP 7

Insert the basket into the two grooves of the steering column, then push it down. Fasten the brake cable with hoop and loop fastener.



#### **PARKING BRAKE**

Simply squeeze brake handle firmly and press the button to engage the lock. To release the lock, squeeze the brake handle again.







## **MARNINGS**

The knee walker can provide assistance to an individual weighing up to 300 lbs.

## **Precautions:**

- ⚠ Do not expose the product to rain.
- ① Do not hang anything on either of the handlebars as this may cause the Knee Walker to tip.
- $\triangle$  Keep the product away from children, for they may tip over and injure themselves.
- Please pay attention to safety while installing, do not put fingers into the spin position and seat cushion card buckled position.
- ⚠ Do not use strong corrosive action cleaner onto product surface.
- ↑ The maximum load of the knee walker is 300lbs.

# **© CONTACT US**

For any inquiries or quality-related issues concerning our products, please send an email to elenkerservice@ hotmail.com, or call (800) 401-7769. We will respond to you as soon as possible.